



Product details		Engineered hardwood floor	
		Herringbone	System Plank
Dimensions in mm (L *W*T)		1082x162x12	972x162x12
Bevel		4-sided V-bevel	
Wear layer		ca. 2,5 mm	ca. 2,5 mm
Profile		Tongue & Groove PRO (header groove-groove)	Tongue & Groove PRO (header groove-groove with loose tongues in the pack)
Packaging	Package:	6 planks (1,052m ²)	6 planks (0,945 m ²)
	Pallet:	40 Pack (42,08 m ²)	40 Pack (37,80 m ²)
Weight	Package:	11,55 kg	10,13 kg
	Pallet:	476,8 kg	420 kg

Tolerances to EN 13489			
Permissible differences in width	± 0,2 mm	Transverse warping	≤ 0,2 %
Permissible squareness variance	≤ 0,2 %	Height differences (between the elements)	≤ 0,2 mm
Longitudinal curvature (along the element)	≤ 0,1 %	Wood moisture at the time of first delivery	5-9%

Product construction:			
Wear layer	hardwood	hardwood	
Middle layer	HDF	HDF	
Stabilizing layer	kraft paper	kraft paper	



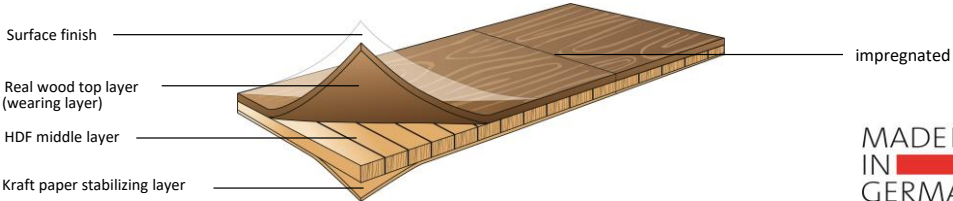

Warranty (according to our separate terms of warranty)	30 years for domestic use	Indications	
---	---------------------------	-------------	--















*with the exception of smoked products

Product properties		
	Test standard	Evaluation
Thermal resistance	DIN EN 4108-4	0,11 m ² K/W
Thermal conductivity	EN 12664	≥ 0,12 W/(m*K)
Biological durability		class 1
PCP-content		< 5 ppm
Formaldehyde	EN 717-2	E1
Reaction to fire	DIN EN 13501-1	Dfl-s1
Resistance to chair castors	DIN EN 13329	No change if soft chair castors are used
Grading specifications	EN 13489	Grading according to factory requirements
Type of installation	EN 13489	Suitable for floating installation or glue down installation. We recommend low emission trowel and adhesive products for glue down. (e.g. according to RAL-UZ 113)
Underfloor heating		Suitable for installation on warm water underfloor heating systems. The surface temperature must not exceed 29 °C. Also suitable for installation on electric heating systems equipped with temperature control and low heat-up technology.
Renovation		Min. 2x sanding with normal wear
Disposal		Private disposal with regular household waste / bulk waste disposal

Surface properties			
Slip resistance	Laquered USRV 70	UV - oiled USRV 73	Natural oiled USRV 94
Stain resistance	1B	1C	1C
Scratch resistance	≥ 20 N	n.n.	n.n.