


| Product features | | Vinyl on HDF baseboard | |
|------------------|---------|---|---|
| Dimensions | | 1209 x 221 x 9,1 mm | 2200 x 217 x 9,1 mm |
| Wear layer | | 0,55 mm | |
| Groove | | umlaufende V-Fuge | |
| Profile | | ClickitEasy | |
| Gloss level | | matt | |
| Packing | pack: | 10 pieces per pack (ca. 2,672 m ²) | 6 pieces per pack (ca. 2,864 m ²) |
| | pallet: | 36 packs per pallet (ca. 96,19 m ²) | 36 packs per pallet (ca. 103,1 m ²) |
| Weight | pack: | 22,7 kg | 24,48 kg |
| | pallet: | 834 kg | 890 kg |







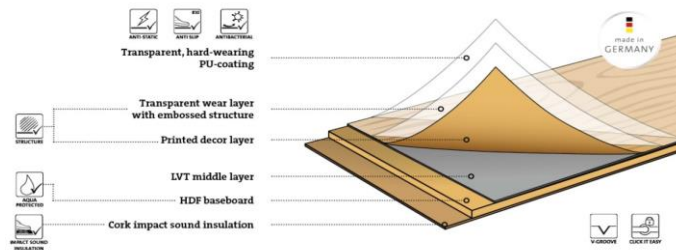







Tolerances: requirements DIN EN 16511

| | | | |
|---|---|---|--|
| Flatness, f [%] [concave/convex] | ≤ 0,50/ ≤ 1,0 (length) ≤ 0,15/ ≤ 0,20 width | Gap openings, o [mm] | ≤ 0,15 (average) ≤ 0,20 (single value) |
| High differences, h [mm] | ≤ 0,10 (average) ≤ 0,15 (single value) | Thickness, t [mm] | ≤ 0,25 |
| Squareness, q [mm] | ≤ 0,20 | Length, l [mm] | l ≤ 1500mm ≤ 0,5; l > 1500mm ≤ 0,3 |
| Straightness, s [mm/m] | ≤ 0,30 | Width, w [mm] | ≤ 0,10, Max.-Min. ≤ 0,2 |
| Dimensional change due to temperature variations [%] | ≤ 0,25 | Minimum content of bonding agent in wear layer | Typ I (80%) |

Product construction:


| | | | |
|--|--|---------|--|
| Warranty (according to separate terms of warranty) | domestic usage 20 years commercial usage 10 years | comment | |
|--|--|---------|--|


Classification DIN 16511

| Usage Class | Test standard | Valuation |
|--|------------------------|--|
|  Usage Class Heavy use in private living room | EN ISO 10874 | 23 |
|  Usage Class Moderate use in commercial sector | EN ISO 10874 | 32 |
|  Reaction to fire | DIN EN 13501-1 | B (fl) s1 flame retardant |
|  Formaldehyde emission | EN 717-1:2005 | fulfils requirements |
|  Light fastness | ISO 105-B02 | m > 6 Grade |
|  Slide resistance | EN 13893 | DS |
|  Slip resistance | DIN 51130 | R10 |
|  Electrostatics | EN 1815 | ≤ 2 kV (antistatic) |
|  Wear resistance | EN 13329 (Enclosure E) | fulfils requirements |
|  Residual indentation | ISO 24343-1 | ≤ 0,15 mm |
|  Resistance to chair castors | EN 425 | No visual impact if soft chair castors are used (type W) |
|  Thermal resistance | EN 12664 | 0,07m ² k/W |
|  Warm water underfloor heating | EN 1264-2 | suitable ≤ 27 °C |
|  Sound absorption | EN ISO 10140 | 14 dB |
|  Swelling in thickness | ISO 24336 | ≤ 18 % |
|  Chemicals test | EN ISO 26987 | passed* |

| | | | | | |
|------------|-----------|-------|---------|---------|---|
| Changed by | ter Hürne | Date: | Nov. 20 | Update: | http://www.terhuerne.com |
|------------|-----------|-------|---------|---------|---|

*Resistant to brief exposure to customary and common oils, acids, greases and alkalins. Staining substances may cause permanent, non-removable discoloration.